

HUANGHUA FAITHFUL INSTRUMENT CO.,LTD.

FRC-1 DISSOLUTION TESTER

- FRC series of instruments are used for detecting velocity and extent of pharmic dissolution from tablet, capsule etc in prescriptive menstruum.

Applicable standards

- National standard (Chinese codex) /2015
- Industry Standard (Dissolution tester)

Features

- It has one vessels and one poles arranged on one line.
- The head part of the instrument can be artificially turned over smoothly and flexibly.
- The basket units and paddle units are made of imported stainless steel (SUS316L).
- The magnetism-pumped circular water current can heat the system evenly, and the bath liquid can achieve an equal temperature.
- A MPU is used in dissolution tester to automatically control the temperature, rotational speed and time, and the parameters can be preset at any time.
- It can be operated conveniently by keystroke. The measurement result is displayed by LED. The preset and real data can be displayed alternately in time.
- Automation: auto-test, auto-diagnose, auto-alarm.

Specifications

- | | | | |
|----------------------------|----------------------------------|------------------------|--------------|
| ●Speed range | (20~200) rpm | ●Speed accuracy | ±2rpm |
| ●Temperature range | ambient to +45.0℃ | ●Temperature Stability | ±0.3℃ |
| ●Preset timing nine points | (5~900) min | ●Time accuracy | ±0.3% |
| ●Paddle radial run-out | ±0.5mm | ●Basket radial run-out | ±1.0mm |
| ●Power | 220V/50Hz/600W or 110V/60Hz/600W | ●Dimension | (26×30×48)cm |



HUANGHUA FAITHFUL INSTRUMENT CO.,LTD.

FRC-3 DISSOLUTION TESTER

- FRC series of instruments are used for detecting velocity and extent of pharomic dissolution from tablet, capsule etc in prescriptive menstruum.

Applicable standards

- National standard (Chinese codex) /2015
- Industry Standard (Dissolution tester)

Features

- It has three vessels and three poles arranged on one line.
- The head part of the instrument can be artificially turned over smoothly and flexibly.
- The basket units and paddle units are made of imported stainless steel (SUS316L).
- The magnetism-pumped circular water current can heat the system evenly, and the bath liquid can achieve an equal temperature.
- A MPU is used in dissolution tester to automatically control the temperature, rotational speed and time, and the parameters can be preset at any time.
- It can be operated conveniently by keystroke. The measurement result is displayed by LED. The preset and real data can be displayed alternately in time.
- Automation: auto-test, auto-diagnose, auto-alarm.



Specifications

- | | | | |
|-----------------------------|----------------------------------|-------------------------|--------------|
| ● Speed range | (20~200) rpm | ● Speed accuracy | ±2rpm |
| ● Temperature range | ambient to +45.0℃ | ● Temperature Stability | ±0.3℃ |
| ● Preset timing nine points | (5~900) min | ● Time accuracy | ±0.3% |
| ● Paddle radial run-out | ±0.5mm | ● Basket radial run-out | ±1.0mm |
| ● Power | 220V/50Hz/600W or 110V/60Hz/600W | ● Dimension | (51×30×48)cm |

HUANGHUA FAITHFUL INSTRUMENT CO.,LTD.

FRC-6 DISSOLUTION TESTER


●FRC series of instruments are used for detecting velocity and extent of pharomic dissolution from tablet, capsule etc in prescriptive menstruum.

Applicable standards

- National standard (Chinese codex) /2015
- Industry Standard (Dissolution tester)

Features

- It has six vessels and six poles, arranged on one line.
- The head part of the instrument can be artificially turned over smoothly and flexibly.
- The basket units and paddle units are made of imported stainless steel (SUS316L).
- The magnetism-pumped circular water current can heat the system evenly, and the bath liquid can achieve an equal temperature.
- A MPU is used in dissolution tester to automatically control the temperature, rotational speed and time, and the parameters can be preset at any time.
- It can be operated conveniently by keystroke. The measurement result is displayed by LED. The preset and real data can be displayed alternately in time.
- Automation: auto-test, auto-diagnose, auto-alarm.
- It can test by self and alarm automatically. The dissolution parameters of Chinese codex are stored in and can be taken out at anytime.
- Time can be preset at many points. The beeper sounds automatically to any point, and then the tester automatically runs to the next one.

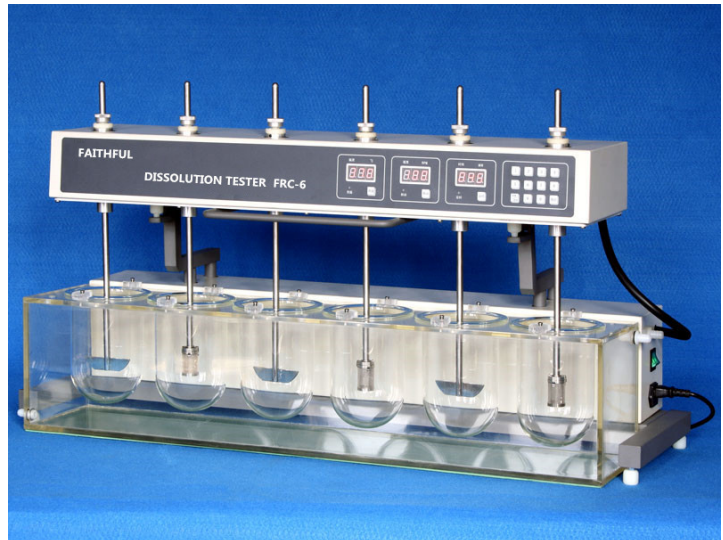

Specifications

- | | | | |
|----------------------------|------------------------------------|------------------------|---------------|
| ●Speed range | (20~200) rpm | ●Speed accuracy | ±2 rpm |
| ●Temperature range | ambient to +45.0 °C | ●Temperature Stability | ±0.3 °C |
| ●Preset timing nine points | (1~999) min | ●Time accuracy | ±0.3 % |
| ●Paddle radial run-out | ±0.5 mm | ●Basket radial run-out | ±1.0 mm |
| ●Power | 220V/50Hz/1200W or 110V/60Hz/1200W | ●Dimension | (96×32×48) cm |

HUANGHUA FAITHFUL INSTRUMENT CO.,LTD.

FRC-8 DISSOLUTION TESTER

●FRC series of instruments are used for detecting velocity and extent of pharomic dissolution from tablet, capsule etc in prescriptive menstruum.

Applicable standards

- National standard (Chinese codex) /2015
- Industry Standard (Dissolution tester)

Features

- It has eight vessels and six poles, with six vessels and six poles in back and other two vessels at front.
- The head part of the instrument can be artificially turned over smoothly and flexibly.
- The basket units and paddle units are made of imported stainless steel (SUS316L).
- The magnetism-pumped circular water current can heat the system evenly, and the bath liquid can achieve an equal temperature.
- A MPU is used in dissolution tester to automatically control the temperature, rotational speed and time, and the parameters can be preset at any time.
- It can be operated conveniently by keystroke. The measurement result is displayed by LED. The preset and real data can be displayed alternately in time.
- Automation: auto-test, auto-diagnose, auto-alarm.
- It can test by self and alarm automatically. The dissolution parameters of Chinese codex are stored in and can be taken out at anytime.
- Time can be preset at many points. The beeper sounds automatically to any point, and then the tester automatically runs to the next one.



Specifications

- | | | | |
|----------------------------|------------------------------------|------------------------|---------------|
| ●Speed range | (20~200) rpm | ●Speed accuracy | ±2 rpm |
| ●Temperature range | ambient to +45.0 °C | ●Temperature Stability | ± 0.3 °C |
| ●Preset timing nine points | (1~999) min | ●Time accuracy | ±0.3 % |
| ●Paddle radial run-out | ±0.5 mm | ●Basket radial run-out | ±1.0 mm |
| ●Power | 220V/50Hz/1200W or 110V/60Hz/1200W | ●Dimension | (96×44×48) cm |